

LASER PAGE READER FOR BARCODED DOCUMENTS





## Technical Features

### Standard Features

Automatic feeding / Adjustable document separation.  
Automatic document alignment.  
Automatic double feeding detection.  
Automatic miss out of paper, overlap & paper jam detection.  
Automatic cleaning on start-up & during jam conditions.  
User-programmable reject capability.  
Alphanumeric display for status messages.

### Optional Features

Downloadable Firmware allows on site customisation & upgrades.  
PDF 417 & other 2D symbologies in restricted cases.

### Operation

Input tray capacity: 550 docs. (90gr/m2 paper)  
Output trays capacity: 400 docs (accepted), 70 docs. (rejected)  
Transport speed: 120 pages/min (A4 or letter)  
Maximum reads: up to 60 codes/page

### Documents

Documents size:  
A4 (Europe) or Letter (U.S.A.) or smaller.  
Minimum size: 2.5" x 3.5" (63 mm x 89 mm )  
Maximum size: 9" x 12" (228 mm x 304 mm)  
Paper density: 80 gr/m2 up to 160 gr/m2 (+ stucked labels)

### Barcode

Readable symbologies: Code 39, Code 128, I2/5, Codabar, UPC/EAN (standard symbologies)  
Readable digits: 62 chars./code  
Maximum code length: 5" (127 mm)  
Maximum code height: 3" (762 mm)  
Minimum bar width: 17 mils.

### Host communications


Type: RS232C (standard)  
Speed: 1200 bps up to 38400 bps.

### Specifications.

Physical:  
Dimensions: 28" x 15 1/2" x 17" (715 mm (l) x 390 mm (w) x 435 mm (h) )  
Weight: 77 lbs. (35 kg)

Environment:  
Operating temperature: 50 to 95 degrees Fahrenheit (+10 to +35 degrees Centigrades)  
Relative operation humidity: 20% to 80% without condensation.

Power:  
Voltage: 115/230V (+10%/-15%) 50/60 Hz.  
Network filter: Delta EMI  
Interference filter  
Power consumption: 100W

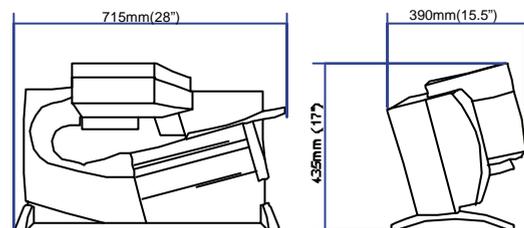

MULTISCAN CORP.  
1110 Brickel Avenue, Suite 310,  
Miami, FL 33131, USA  
Ph: (1-305) 373 8007  
Fax: (1-305) 373 8058  
info@multiscan-corp.com  
Web Site: www.multiscan-corp.com

