

AUTOMATIC BARCODED ENVELOPE READER MV-75



MULTISCAN MV-75 captures the barcode in envelopes of different size.

MULTISCAN MV-75 can also count the envelopes and arrange batches of a certain amount.

MULTISCAN MV-75 automatically feeds the envelopes and can adjust each batch width.

Data from read envelopes is sent to a PC to be recorded and processed.



Operation speed can be selected by the user up to 6 envelopes per second (for envelopes of 4" high).

It is provided with an automatic discard bin for rejected envelopes.



Technical Features

- Automatic feeding of different kinds of envelopes.
- Adjustable envelope feeding according to thickness.
- Automatic error feeding detection.
- Readable codes: I2/5, C128, Code 39, CODABAR, Code 93, UPC/EAN.
- It can read up to 62 characters per code.
- It can read up to 6 codes per envelope.
- Maximum code density: 10 mils.
- Reading speed: adjustable up to a maximum of 6 envelopes per second (for 4" high envelopes), or 2 envelopes per second (for 12" high envelopes).
- Host communication. Type: RS 232 (standard).
- Document size:
 - Minimum: 3" x 4"
 - Maximum: 9 1/2" x 12"
 - Width: 0.8mm to 5mm
- Feeding tray capacity up to 180 envelopes (1mm wide).
- It can be adjusted up to 500 envelopes (optional).
- One tray for read envelopes with capacity for 180 envelopes.
- Feeding: 110/220, 50/60 Hz.

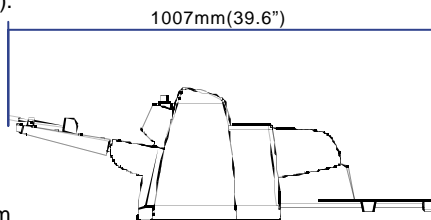

MULTISCAN CORP.
 1110 Brickel Avenue, Suite 310,
 Miami, FL 33131, USA
 Ph: (1-305) 373 8007
 Fax: (1-305) 373 8058
 info@multiscan-corp.com
 Web Site: www.multiscan-corp.com