




Ceaseless Creativity for a Sustainable World

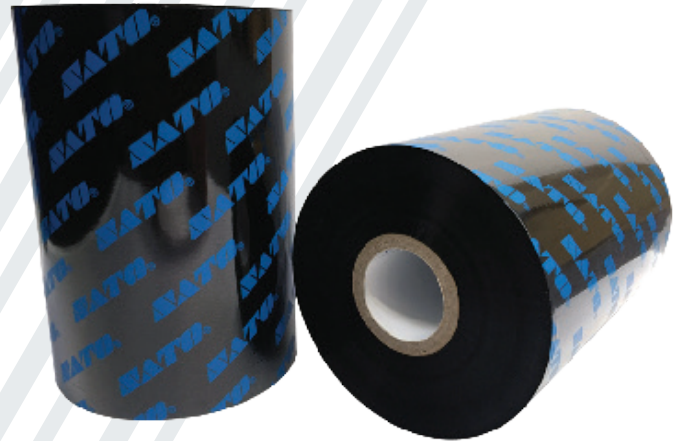

## SWR-200, THE VALUE WAX-RESIN NEAR EDGE BY SATO

### APPLICATIONS



Healthcare



Horticulture



Pharmaceutical



Produce



Retail



Transportation



Warehouse



Metals



Industrial



Lumber



Flexible Packaging

### FEATURES

Low printhead energy

---

Abrasion resistance

---

Print flexibility

---

High density print

---

Anti-static printhead saver coating for printhead protection


---

# TECHNICAL INFORMATION

## SWR-200

### RIBBON PROPERTIES

<b>Ink</b>	Wax Resin
<b>Colour</b>	Black
<b>Thickness</b>	<8.0µm
<b>Carrier</b>	4.5µm Polyester Film
<b>Ink Melting Point</b>	70°C
<b>Optical Density (transmission)</b>	>0.80
<b>Optical Density (reflective)</b>	>1.60
<b>Maximum Print Speed</b>	600mm/s

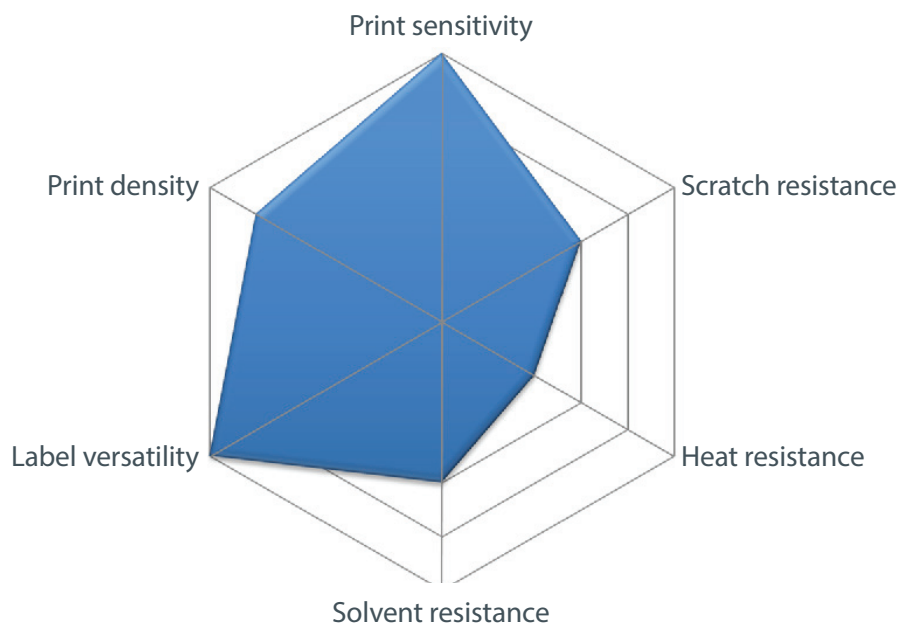

### RECOMMENDED SUBSTRATES

<b>Papers</b>	Uncoated, Coated, Card
<b>Synthetics</b>	Polyester, Polyethylene, Polypropylene, PVC