

SWR-300, THE VALUE WAX-RESIN NEAR EDGE ON PACKAGING BY SATO

APPLICATIONS



Healthcare



Retail



Pharmaceutical



Produce



Flexible Packaging

FEATURES

Low printhead energy

Abrasion resistance

Print flexibility

High density print

High speed


Anti-static printhead saver coating for printhead protection

TECHNICAL INFORMATION

SWR-300

RIBBON PROPERTIES

Ink	Wax Resin
Colour	Black
Thickness	<8.0µm
Carrier	4.5µm Polyester Film
Ink Melting Point	70°C
Optical Density (transmission)	>0.80
Optical Density (reflective)	>1.60
Maximum Print Speed	800mm/s

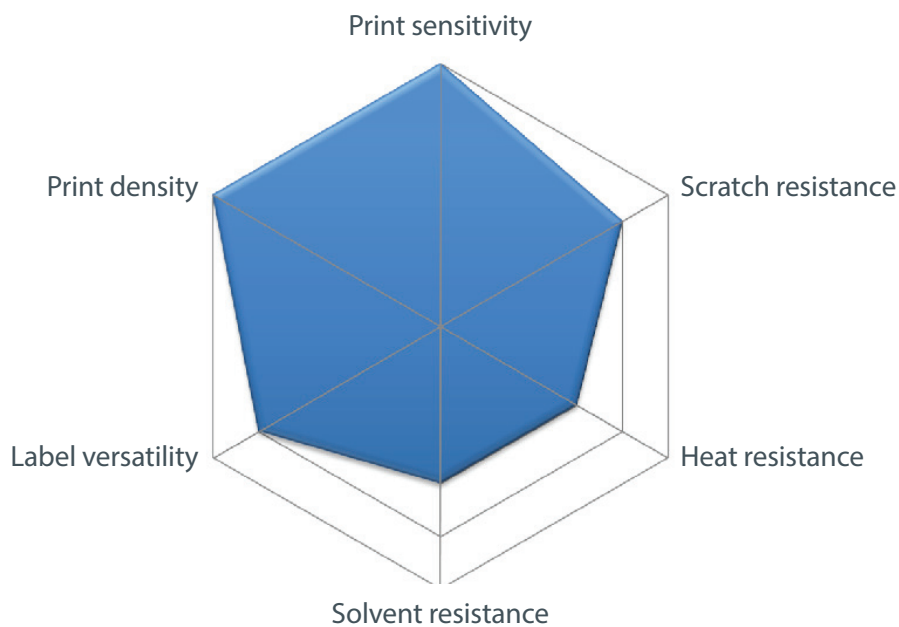

RECOMMENDED SUBSTRATES

Papers	Uncoated, Coated, Card
Synthetics	Polyester, Polyethylene, Polypropylene, PVC