

CUSTOM[®]

 **Bluetooth**[®]

IRDA/RS232



www.sixload.com

Print from
PalmOS and
PocketPC

Light Weight

Long Lasting

Thermal Portable Printers

s'print

s'print

s'print portable thermal printers offer an innovative alternative to impactbased systems.

Very light weight and compact size. Easy paper automatic loading through the "sixload" patented system. End of paper and black mark sensors. Updating customer logo and most common barcodes printing: EAN 13, EAN 8, CODE 39, ITF, CODABAR.

s'print-s is powered using an external power supply, with RS232 serial interface.

The printer is suitable for applications such as instruments, receipts and coupon printing, bank transactions confirming reports.

s'print-b is powered using batteries with RS232 serial interface + Bidirectional infrared.

s'print-i is powered using batteries with RS232 serial interface+IrDA (IrDA protocol supported: IrLPT/IrCOMM 3 wire raw).

s'print-BT is able to print wireless at high speed without any alignment thanks to *Bluetooth*® wireless specification.

It is powered by batteries with RS232 serial interface + *Bluetooth*® technology.

The supported profiles are SPP (Serial Port Profile) that provides RS232 serial cable emulation, and OPP (Object Push Profile) enabling the print-out of vCard format objects (business cards).

s'print-b, s'print-i and s'print-BT are suitable for "wireless" applications, combined with PDAs, laptop computers and mobile phones.

s'print-LP1 printer for labels, width 58mm and height 1" inch minimum. s'print-LP1 finds ideal application in automatic identification and safety markets, in automotive and combined with portable terminals without printers. It is equipped with EasyLabel software to create/manage labels (Windows 98/2k/XP).

Print from PDAs

With s'print is possible to print text and graphic from all Palm Powered products thanks to PalmOSprint free application.

It's also available on request a libraries set to allow printing application development.

PalmOS and Microsoft PocketPC2002/2003 are the supported platforms.

Batteries

Battery charger: 12-36 VDC/0.6A.

Batteries: 5 AA penlight (NI-MH/NI-CD/ALKALINE).

Battery Life: 140 mt. of paper (STANDARD CUSTOM receipt and 1850 mAh battery).

Autonomy (hours): 2 h 20 min (STANDARD CUSTOM receipt and 1850 mAh battery).

Accessories


S'print is equipped with:

- handy belt fixing hook
- smart and tough shock resistant holder



s'print
Your Smaller
Portable Printer

Handy and smart pocket pouch

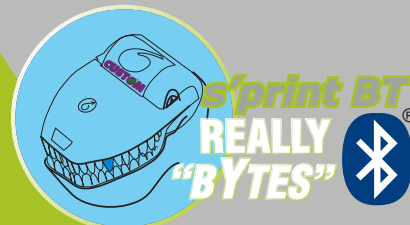

CUSTOM

s'print - s

s'print - b

s'print - i / LP1

s'print - BT / LP1

Printing Method	Thermal line printing			
Resolution	203 dpi			
Printing Speed	> 50 mm/sec (It depends by the battery status, the printing typology and the environment temperature.)			
Columns	24 (40/42 version is available)			
Character Set	ASCII standard, International			
Type Styles	Normal, double height/width, negative, underlines, expanded			
Printing Direction	Straight, reverse			
Paper Width	58 mm			
Roll Dimension	57.5 mm ± 1mm			
Emulation	Custom			
Interface	RS232	RS232 + Bidirectional infrared		RS232 + <i>Bluetooth</i> ® technology (classe di potenza: 3, distanza max: 10 m.)
IRDA protocol			IrLPT, IRCOMM 3 wire RAW	
Supported <i>Bluetooth</i> ® profiles				SPP (Serial Port Profile) & OPP (Object Push Profile)
Baud Rate	600 to 38.400 bps			
Data Buffer	128 byte			
Flash Memory	32K			
Graphic Memory	1 logo of 384 x 85 dot			
Drivers	Windows™ 95 / 98 / me / NT4 / 2K / XP			Windows™ NT4 / 2K / XP
Software Tools	LogoEditor, FontEditor, Easy Label, 40/42 columns font available			
Power	9 - 48 VDC / 11VA	12-36 Vdc / 0.6A (battery charger)		
Power Consumption	1200 - 230 mA	925 mA		
Reliability MTBF	50 Km			
Safety	EN60950+A1+A2+A3+A4			
Dimension	146 x 88 x 65 mm			
Weight	370 gr (without paper roll)			



Automotive Applications Approval



CUSTOM[®]


CUSTOM ENGINEERING SPA

Via Berettine, 2 - 43010 Fontevivo, Parma ITALY
Tel. +39 0521 680111 - Fax +39 0521 610701
info@custom.it - www.custom.it



M. U. R. S. T.
Ministry University
Research Scientific
Technology
Authorized laboratory
no. 50846ZYZ

POS Solutions

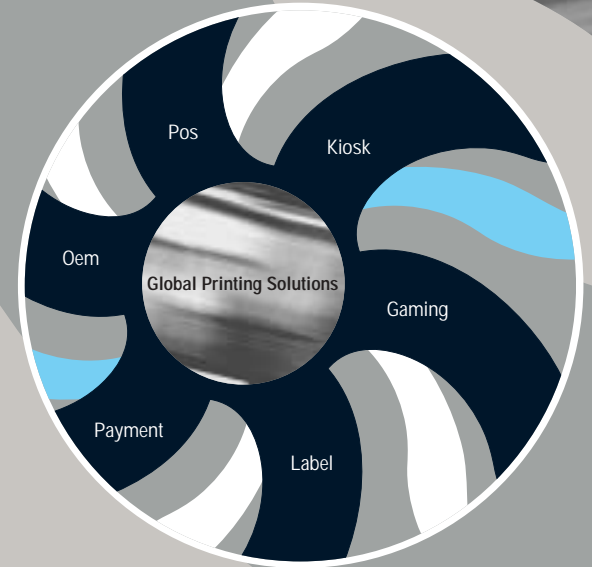

CUSTOM ENGINEERING MILAN
Via Pavia, 10 - 20053 Muggiò, Milano ITALY
Tel. +39 039 2144280 - Fax +39 039 2144249
custom.milano@custom.it

CUSTOM ENGINEERING MODENA
V.le Virgilio, 56D - 41010 Modena ITALY
Tel. +39 059 8869511 - Fax +39 059 8869512
custom.modena@custom.it

CUSTOM ENGINEERING UK LTD
31 Scott Road, Sundon Park
Luton LU3 3BF UK
Tel +44 (0) 1582 582258 - Fax +44 (0) 1582 564888
uk.sales@custom.it

CUSTOM ENGINEERING IBERIAN
Calle Azagador de Alboraya, 14 P.ta 16
46020 Valencia SPAIN
Tel. +34 96 3627315 - Fax +34 96 3627315
es.sales@custom.it

CUSTOM ENGINEERING USA
625 West University Drive, Unit C
Arlington Heights, IL 60004 USA
Tel. +1 847 818 1260 - Fax +1 847 818 1287
us.sales@custom.it